

PRODUCES DROPLETS

ULTRA COARSE

ACCORDING TO WORKING PRESSURE

EXTENDED RANGE



FLAT FAN



30 - 75 PSI
2,07 - 5,17 bar
207 - 517 kPa

- High durability ceramic nozzle (99% alumina) with outstanding wear-resistance.
- Produces extended range of spray up to 6.5 meters.
- For boomless sprayers, it is recommended the installation of MJE nozzle in each end of the boom to promote 12 meters wide of swath.
- For boom sprayers, it is recommended the installation of MJE nozzle in the end of the boom promoting an extension up to 13 ft.
- Excellent for roadside and right-of-way applications.
- The pre-orifice maintains the balance of internal pressures, performing best between 30 and 75 psi.
- Low risk of potential drift.

FOR MORE
INFORMATION




PACK WITH
2 un



STRAINERS
Pg. 83

PART NUMBER	NOZZLE	THREAD	DROP SIZE					LITERS PER HECTARE													
								4	5	6	7	8	9	10	12	14	16	18	20	25	* M
								km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h	km/h
MJ392 MJE 008	11/16" W/ADAP 1/4" BSP	UC	2,07	30	207	2,65	80	64	53	45	40	35	32	27	23	20	18	16	13	5,00	
		UC	3,10	45	310	3,30	99	79	66	57	50	44	40	33	28	25	22	20	16		
		UC	4,14	60	414	4,45	134	107	89	76	67	59	53	45	38	33	30	27	21		
MJ393 MJE 010	11/16" W/ADAP 1/4" BSP	UC	5,17	75	517	4,95	149	119	99	85	74	66	59	50	42	37	33	30	24	5,70	
		UC	2,07	30	207	3,40	89	72	60	51	45	40	36	30	26	22	20	18	14		
		UC	3,10	45	310	4,10	108	86	72	62	54	48	43	36	31	27	24	22	17		
MJ394 MJE 012	11/16" W/ADAP 1/4" BSP	UC	4,14	60	414	4,85	128	102	85	73	64	57	51	43	36	32	28	26	20	5,80	
		UC	5,17	75	517	5,50	145	116	96	83	72	64	58	48	41	36	32	29	23		
		UC	2,07	30	207	3,80	98	79	66	56	49	44	39	33	28	25	22	20	16		
MJ395 MJE 015	11/16" W/ADAP 1/4" BSP	UC	3,10	45	310	4,65	120	96	80	69	60	53	48	40	34	30	27	24	19	5,80	
		UC	4,14	60	414	5,35	138	111	92	79	69	61	55	46	40	35	31	28	22		
		UC	5,17	75	517	6,00	155	124	103	89	78	69	62	52	44	39	34	31	25		
MJ396 MJE 020	11/16" W/ADAP 1/4" BSP	UC	2,07	30	207	5,00	129	103	86	74	65	57	52	43	37	32	29	26	21	6,20	
		UC	3,10	45	310	6,00	155	124	103	89	78	69	62	52	44	39	34	31	25		
		UC	4,14	60	414	7,00	181	145	121	103	91	80	72	60	52	45	40	36	29		
MJ397 MJE 024	11/16" W/ADAP 1/4" BSP	UC	5,17	75	517	8,00	207	166	138	118	103	92	83	69	59	52	46	41	33	6,50	
		UC	2,07	30	207	6,50	157	126	105	90	79	70	63	52	45	39	35	31	25		
		UC	3,10	45	310	7,90	191	153	127	109	96	85	76	64	55	48	42	38	31		
MJ398 MJE 032	11/16" W/ADAP 1/4" BSP	UC	4,14	60	414	9,60	232	186	155	133	116	103	93	77	66	58	52	46	37	6,50	
		UC	5,17	75	517	12,40	286	229	191	164	143	127	114	95	82	72	64	57	46		
		UC	2,07	30	207	10,10	233	186	155	133	117	104	93	78	67	58	52	47	37		
			UC	3,10	45	310	12,20	282	225	188	161	141	125	113	94	80	70	63	56	45	6,50
			UC	4,14	60	414	13,80	318	255	212	182	159	142	127	106	91	80	71	64	51	
			UC	5,17	75	517	14,80	342	273	228	195	171	152	137	114	98	85	76	68	55	

* swath width (M) for 1.6 meters height at 40 PSI.

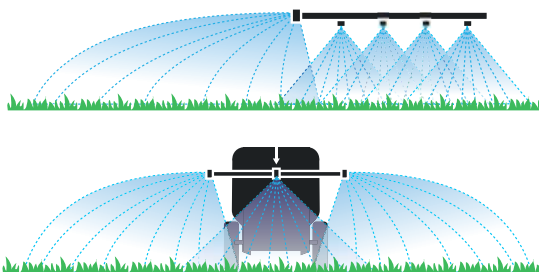

M398/1

FITTING WITH 11/16" to 1/4" external threads

